



# LB1-UW12-x Cabinet Loudspeakers



- ▶ **Good speech intelligibility and background music reproduction**
- ▶ **Available in black or white**
- ▶ **MDF construction**
- ▶ **Complies with international installation and safety regulations**

The LB1-UW12-x is a 12 W, general-purpose, cost-effective loudspeaker for indoor use. Keyholes at the rear provide quick and easy wall mounting. The angled front baffle results in a better sound in the listening area. The cabinet is available in black or white.

## Functions

The robust, solid MDF (Medium Density Fiber board) enclosures are covered with a durable, easy-to-clean vinyl in a choice of white or black. The ABS fronts are covered with fine woven cloth in matching color.

The angled front baffle results in improved high frequency reproduction in the listening area.

## Certifications and Approvals


All Bosch loudspeakers are designed to withstand operating at their rated power for 100 hours in accordance with IEC 268-5 Power Handling Capacity (PHC) standards. Bosch has also developed the Simulated Acoustical Feedback Exposure (SAFE) test to demonstrate that they can withstand two times their rated power for short durations. This ensures extra reliability under extreme conditions,

leading to higher customer satisfaction, longer operating life, and much less chance of failure or performance deterioration.


Region	Certification	
Europe	CE	Declaration of Conformity
Safety	acc. to EN 60065	

## Installation/Configuration Notes


Three keyholes in the rear panel provide easy and quick wall mounting. A convenient easy-to-use, 4-pole push-in terminal block is present on the rear panel for on-site wiring. This terminal block has provision for power tapping on the 100-volt, matching transformer in the cabinet. It allows selection of nominal full-power, half-power or quarter-power radiation (in 3 dB steps).

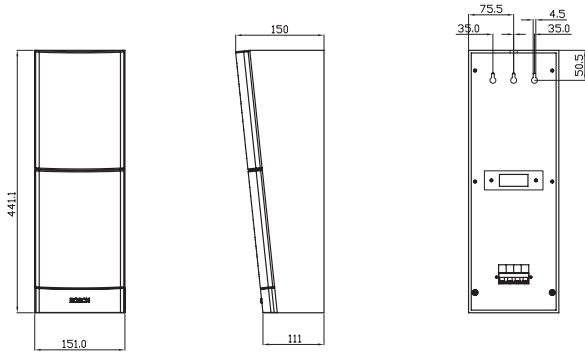


Dimensions in mm




Circuit diagram

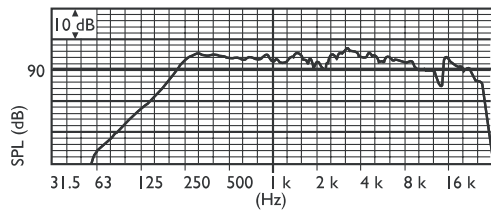

Frequency response

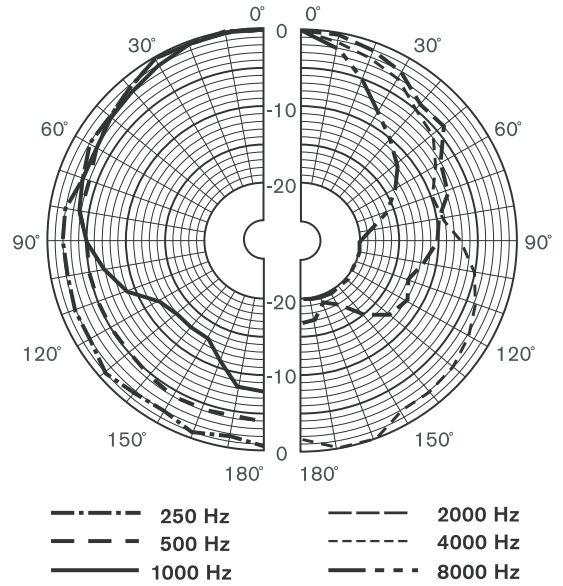

Polar diagram horizontal (measured with pink noise)

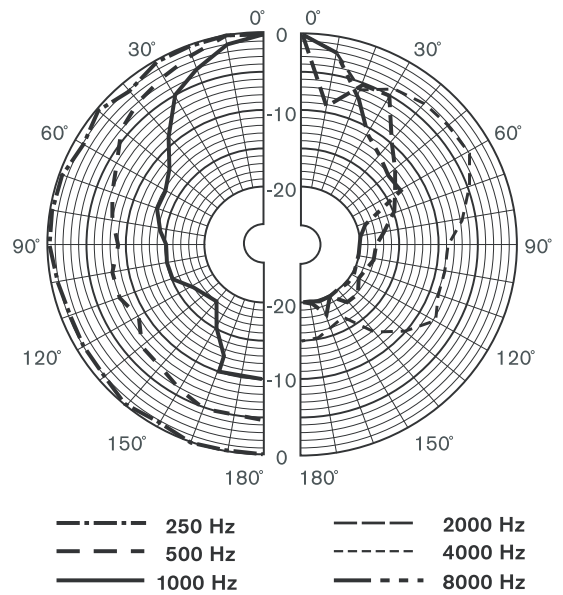

Polar diagram vertical (measured with pink noise)

## Technical Specifications

### Electrical\*

Maximum power	18 W
Rated power	12 / 6 / 3 W
Sound pressure level at 12 W / 1 W (1 kHz, 1 m)	104 / 93 dB (SPL)
Effective frequency range (-10 dB)	160 Hz to 20 kHz
Opening angle	1 kHz / 4 kHz (-6 dB)
horizontal	195° / 95°
vertical	69° / 17°
Rated input voltage	100 V
Rated impedance	833 ohm
Connector	4-pole push-in terminal block

\* Technical performance data acc. to IEC 60268-5

### Mechanical

Dimensions (H x W x D)	441 x 151 x 150/111 mm (17.4 x 5.9 x 5.9/4.4 in)
Weight	2.5 kg (5.5 lb)
Color	Black (D) or white (L)
cabinet / cloth (D)	Matches RAL 9004 / RAL 9004
cabinet / cloth (L)	Matches RAL 9010 / RAL 7044

### Environmental

Operating temperature	-25 °C to +55 °C (-13 °F to +131 °F)
Storage temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Relative humidity	<95%

## Ordering Information

<b>LB1-UW12-D Cabinet Loudspeaker</b> 12 W, black	<b>LB1-UW12-D</b>
<b>LB1-UW12-L Cabinet Loudspeaker</b> 12 W, white	<b>LB1-UW12-L</b>

**Americas:**  
Bosch Security Systems, Inc.  
Communications Systems  
12000 Portland Avenue, South  
Burnsville, Minnesota 55337, USA  
Phone: +1-800-392-3497  
Fax: +1-800-955-6831  
audiosupport@US.bosch.com  
www.boschcommunications.us

**Europe, Middle East, Africa:**  
Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Asia-Pacific:**  
Robert Bosch (SEA) Pte Ltd  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2600  
Fax: +65 6571 2698  
apr.securitysystems@bosch.com  
www.boschsecurity.com

**Represented by**